



Digital Clocks

DIGI H


The most important information in our daily life is the time. Everything is focused on the time. The digital clocks of the model range DIGI H display the time clearly and conse-

quently. Pleasant green, loud red or yellow, modern blue - in any case always accurate and conspicuous. The digital clocks DIGI H from **MOBATIME** – for absolute information.


Digital Clocks

DIGI H

Surface

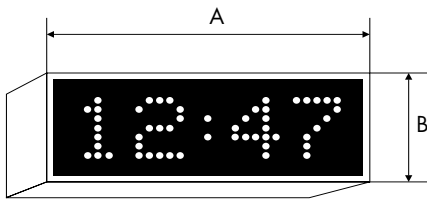

Flush

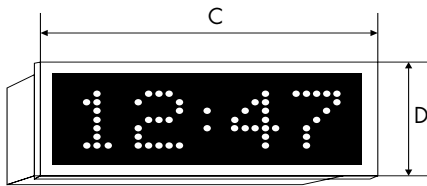

DIGI H

Order Ref.
Example
420A.05.R.S.

Type of clock	Mounting method	Display: hrs, min., sec.	Display: hrs, min.	Display: hrs, min., sec. Analog second	Colour of luminous segments:	Display heights in mm	A	B	C	D	Depth of case	Visibility in m
401A.05.G.	...	✓			green	50 + 30	305	90	317	102	58	20
401A.05.R.	...	✓			red	50 + 30	305	90	317	102	58	20
401A.05.B.	...	✓			blue	50 + 30	305	90	317	102	58	10
401A.05.Y.	...	✓			yellow	50 + 30	305	90	317	102	58	20
401A.12.G.	...	✓			green	120 + 100	670	180	682	192	58	60
401A.12.R.	...	✓			red	120 + 100	670	180	682	192	58	60
401A.12.UY.	...	✓			ultra-yellow	120 + 100	670	180	682	192	58	60
420A.05.G.	...		✓		green	50	240	90	252	102	58	20
420A.05.R.	...		✓		red	50	240	90	252	102	58	20
420A.05.B.	...		✓		blue	50	240	90	252	102	58	10
420A.05.Y.	...		✓		yellow	50	240	90	252	102	58	20
420A.12.G.	...		✓		green	120	480	180	492	192	58	60
420A.12.R.	...		✓		red	120	480	180	492	192	58	60
420A.12.UY.	...		✓		ultra-yellow	120	480	180	492	192	58	60
490A.02.G.	...			✓	green	20	144	144	156	156	58	7
490A.02.R.	...			✓	red	20	144	144	156	156	58	7
490A.05.G.	...			✓	green	50	300	300	312	312	58	20
490A.05.R.	...			✓	red	50	300	300	312	312	58	20
490A.05.B.	...			✓	blue	50	300	300	312	312	58	20

Further models on request

DIGI H

General technical data for all types

Power supply voltage:	230 VAC / 50 Hz	
Operation mode:	DCF / MSF MOBALine Internal quartz clock Minute impulses 24-48 V	✓ ✓ ✓ ✓
Display colours:	green (anti-reflect), red, blue, yellow or ultra-yellow	✓
Display brightness:	automatic or manual (7 levels)	✓
Mounting method:	Surface, inclinable (with 2 mounting brackets) Flush with flush fitting case (depth 80 mm) Flush with front bezel (max. thickness 22 mm) Single sided with vertical suspension (tube 20 mm) Double sided with vertical suspension (tube 20 mm)	S B F SC DS
Case:	Aluminium anodised black, bronze or silver Aluminium Option RAL colours Different models also available with IP-65 case for outdoor mounting	✓ ✓
Options:	Remote control for stop watch operation Start / Stop Remote control for stop watch operation multifunction Temperature sensor For 24 V DC DCF 77 receiver for indoor use DCF 77 receiver for outdoor use	496A 402A 406 24DC 484.07 484.03